


Seals design (temp. range 220°C to 400°C)



STATIC SEAL

Spiral wound gasket

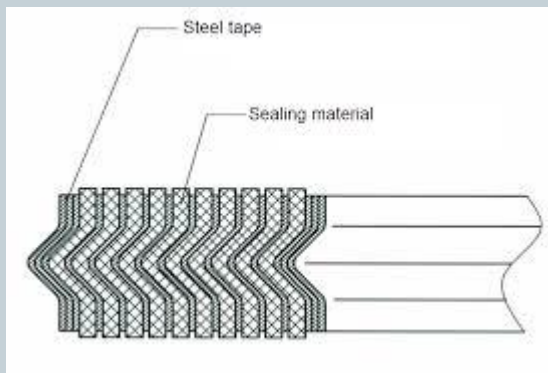

Fire Safe Seals Graphite



DYNAMIC SEAL

Energized «V» Pack for seat and stem seal area

